

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BR 95



Safe loading and unloading

Single point lifting device and optional transport wheels



Robust machine design

Engine protection guard and cyclone air pre-filter

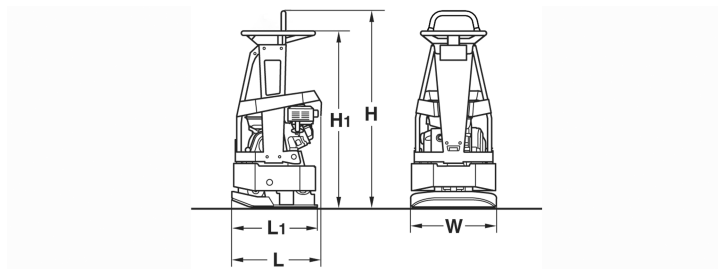


Comfortable ride and handling

Low HAV ($<2.5\text{m/s}^2$), comfortable driving grip and good driving characteristics

Shipping dimensions in m3**BR 95**

0,220

**Standard Equipment**

- ☒ Vibration damped comfort handle
- ☒ Highly wear resistant base plate
- ☒ Recoil starter
- ☒ Engine protection frame
- ☒ Single point lifting device
- ☒ additional large single-point suspension (removable)
- ☒ 3-2-1 Warranty
- ☒ Automatic shutdown at low oil level

Optional Equipment

- ☐ Transport wheels
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit
- ☐ Tough Warranty

Dimensions in mm

	H	H1	L	L1	W
BR 95	1030	930	475	450	450

Technical Data**BOMAG****BR 95****Weights**

Operating weight CECE	kg	92
Basic weight	kg	90

Dimensions

Working width	mm	450
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda	
Type	GX 160	
Emission stage	StageV/CARB P.3	
Cooling	air	
Number of cylinders	1	
Performance SAE J 1349	kW	3,5
Speed	min-1	3.400
Drive system	mech.	
Fuel	Gasoline	
Fuel comsump. aver. during operation	l/h	1,1

Exciter system

Frequency	Hz	90
Centrifugal force	kN	15
Amplitude	mm	1,28

Capacities

Fuel	l	3,1
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 630 21 010

251021 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

