

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BR 95 E



Greater ease of operation

Comfort start and good access to all control elements



Robust machine design


All around protected and maintenance-free drive components



Comfortable ride and handling

Precise control with low hand-arm vibrations

Shipping dimensions in m3
BR 95 E 0,209

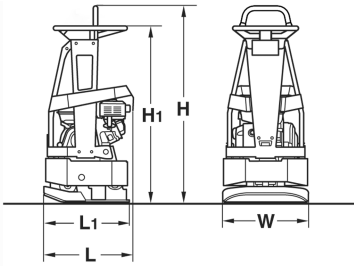

Standard Equipment

- ☒ Vibration damped comfort handle
- ☒ Highly wear resistant base plate
- ☒ Comfort start
- ☒ Maintenance-free brushless electric motor
- ☒ Single point lifting device
- ☒ additional large single-point suspension (removable)
- ☒ 3-2-1 Warranty
- ☒ Fully protected V-belt

Optional Equipment

- ☐ Transport wheels
- ☐ Special painting
- ☐ Tool kit
- ☐ Service Kit
- ☐ Battery eP 20 (20Ah)
- ☐ Battery eP 28 (28Ah)
- ☐ Standard charger
- ☐ Quick charger
- ☐ Vulcolan mat

Dimensions in mm

	H	H1	L	L1	W
BR 95 E	1030	930	450	450	450

Technical Data

BOMAG
BR 95 E

Weights

Operating weight CECE	kg	100
Basic weight	kg	90

Dimensions

Working width	mm	450
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	30
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine type	Asynchronous motor
Emission stage	no emissions
Cooling	air
Performance	kW 3,1
Speed	min-1 4.330
Drive system	electric

Exciter system

Frequency	Hz	90
Centrifugal force	kN	15
Amplitude	mm	1,60

Electric equipment

battery, type	Li-Ion
Operating voltage	V 51

Technical modifications reserved. Machines may be shown with options.



PRE 630 22 010

240425 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

